

### 1. Front Flange Mounting Cylinder

- ◆ Piston Rod - 280 mm
- ◆ Stroke - 2260 mm
- ◆ Mounting Type - Front Flange
- ◆ Used in Pressing applications at steel plant




### 2. SS TELESCOPIC CYLINDER

- ◆ Bore Dia - 40 mm
- ◆ 1ST Piston Rod - 105 mm
- ◆ 2ND Piston Rod - 60 mm
- ◆ Stroke - 440 mm
- ◆ Mounting - Clevis type
- ◆ Used in Food Industries



### 3. Tie Rod Cylinder

- ◆ Bore Dia - 150 mm
- ◆ Piston Rod - 63 mm
- ◆ Stroke - 1000 mm
- ◆ Mounting Type - Front Flange
- ◆ Used in Pulling applications

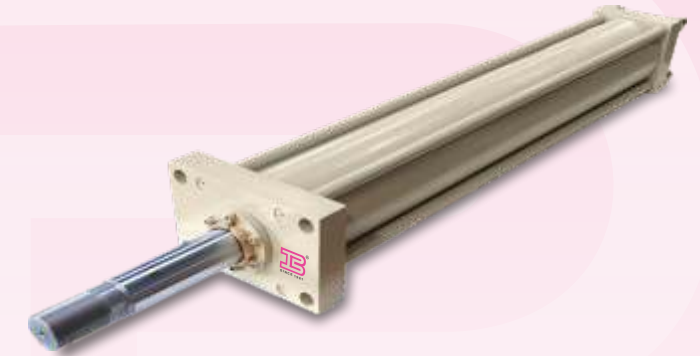

### 4. Tie Rod Cylinder

- ◆ Bore Dia - 80 mm
- ◆ Piston Rod - 30 mm
- ◆ Stroke - 25 mm
- ◆ Mounting Type - Rear Plate
- ◆ Used in Pushing operation/applications



### 5. Bolted Type Cylinder

- ◆ Bore Dia - 125 mm
- ◆ Piston Rod - 50 mm
- ◆ Stroke - 1000 mm
- ◆ Mounting - Front Flange
- ◆ Used in Lifting application



### 3. Tie Rod Cylinder

- ◆ Bore Dia - 150 mm
- ◆ Piston Rod - 63 mm
- ◆ Stroke - 1000 mm
- ◆ Mounting Type - Front Flange
- ◆ Used in Pulling applications



### 9. Bed Lift Cylinder (Single Acting)

- ◆ Bore Dia - 80 mm
- ◆ Piston Rod - 63 mm
- ◆ Stroke - 25 mm
- ◆ Mounting - Surface
- ◆ Used in Pressing application



### 4. Tie Rod Cylinder

- ◆ Bore Dia - 80 mm
- ◆ Piston Rod - 30 mm
- ◆ Stroke - 25 mm
- ◆ Mounting Type - Rear Plate
- ◆ Used in Pushing operation/applications



### 10. Weld Type Cylinder

- ◆ Bore Dia - 100 mm
- ◆ Piston Rod - 70 mm
- ◆ Stroke - 260 mm
- ◆ Mounting - Front Flange
- ◆ Used in Lifting applications



### 5. Bolted Type Cylinder

- ◆ Bore Dia - 125 mm
- ◆ Piston Rod - 50 mm
- ◆ Stroke - 1000 mm
- ◆ Mounting - Front Flange
- ◆ Used in Lifting application



### 11. Ram Cylinder (Tie Rod)

- ◆ Bore Dia - 250 mm
- ◆ Piston Rod - 180 mm
- ◆ Stroke - 2000 mm
- ◆ Mounting - Front Flange
- ◆ Used in Pushing application

